


DYNACORE

PROFESSIONAL STAGE LIGHTING



AUSLINK AND BROTHERS LTD.


Office address: BB 25H Alaba int'l mrkt ojo Alaba Lagos.,
Branch office: No 17 Mitchelle plaza Alaba int'l Road Ojo Lagos.
Branch office: Bble Alaba International Market Ojo Lagos
Website: www.auslinklighting.com
Email: auslink29@yahoo.com
greatdestiny2020@gmail.com
Phone: 08033009328, 08089282474, 07046131801

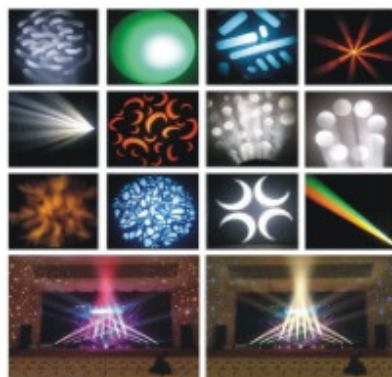CA440**440W MOVING HEAD SPOT/WASH/BEAM 3IN1****Technical Parameters**

Power supply: AC 100 - 240V, 50/60Hz
 Power consumption: 600W
 Light source: OSRAM SIRIUS HR1 440W 20R
 Beam angle: 2-7° Spot angle: 5-32° Wash angle: 8-70°
 Control panel: LCD display
 Controls: auto, master/slave, DMX512
 DMX channels: 20 channel mode
 Pan/Tilt rotation: 540° / 270°, speed adjustable
 Color: 11 color + white, with forward and reverse rainbow effect.
 Gobo wheel: gobo I with auto rotation of each gobo (6 gobos plus white color);
 gobo II (18 gobos plus white color)
 Prism wheel: rotation 8-face prism and 4-linear prism
 Focus: Electronic focus, ultra smooth and adjust the focus
 Atomization: 0-100% linear adjusting atomization effect
 Dimmer: 0-100% linear dimming function
 Strobe: Flash speed up to 10 times /sec, random flash optional
 Dimension size: 420×420×640mm
 Packing size: 550×550×700mm
 N.W: 31kg
 G.W: 35kg

CA250**250W MOVING HEAD BEAM LIGHT****Technical Parameters**

Power Supply: 100-240V, 50/60HZ
 Power consumption: 350 W
 Bulb: Philips MSD Platinum 250w
 Light bulb life: about 2200 hours, color temperature: 8,000 K;
 Pan/Tilt rotation : 540°/ 270°
 Color disk: a color plate, each color disk is composed of 14 color sheets;
 Pattern plate: 13 pattern effects;
 Effect wheel: two large-angle rotatable prisms (superposable), double-layer prism/ 16-prism (optional prism);
 Atomization function colorful color plate;
 0-100% mechanical dimming, support mechanical stroboscopic and adjustable stroboscopic effect,
 support stroboscopic macro function;
 Multilayer combined lens group optical system, electric focusing, beam angle 0 ~ 4 °;
 Overheating protection;
 IP protection grade: Ip20;
 Dimension size: 32.7×26.8×49 cm;
 Packing size: 43×40.5×55cm;
 N.W: 14.5 KG
 G.W: 52Kg(2in1 flycase)

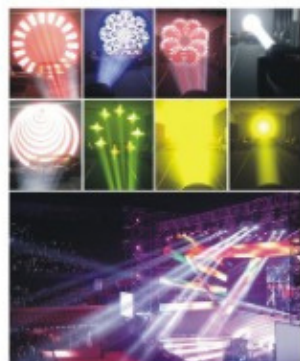CA350**350W MOVING HEAD SPOT/WASH/BEAM 3IN1****Technical Parameters**


Power Supply: AC100V-240V, 50-60Hz
 Lamp: YODN 350W 17R
 Control: 20/24CH DMX512
 Lifespan: 1500-2000 Hours
 Lumen value parameter: 20m/186700Lux, 40m/48175Lux, 60m/20855Lux
 Color wheel: 13 colors + white
 Gobo wheel: Rotated gobo wheel + Metal Gobo pattern plate
 Prism: 16-facet prism and 6-linear prism, both can be Bidirectional rotation, beam angle can be freely zoom in or out.
 Beam effect: Multiple beam angle variation effect
 Focus: Linear Focus
 Dimmer: 0-100% linear dimming
 Scanner: pan:3.0sec/540°, Tilt:2.0sec/250°
 Beam Angle: parallel beam angle 0-2.3°
 Strobe: Double strobe structure, 0.5-14times/sec
 Other Function: Remote control light bulb switch, SUNON Brand fan
 Appearance: High temperature plastic shell, high strength alloy, cold forming inner core material
 Dimension size: 42×30×63mm
 Packing size: 85×48×80cm(flightcase 2in1)
 N.W:21kg
 G.W:70kg(flightcase 2in1)

CA330B /CA350B**330W/3550W MOVING HEAD BEAM LIGHT****Technical Parameters**

Power Supply: 100-240V, 50/60HZ
 Lamp: YODN 350W 17R (330W/380W are optional)
 Control: 18CH DMX512
 Color Temperature: 7500K
 Lifespan: 1500-2000 Hours
 Function: A color plate .14 colors + white, a pattern plate .17 + white
 Replaceable gobo wheel, high-speed swing effect, an atomizer, an 8 prisms, 16 prisms optional, can reverse the direction of rotation
 And a prism positioning.
 Dimming: 0-100 Dimmer Strobe: ultra-fast strobe
 Display: LCD display bilingual(English and Chinese) operating system
 Optics: modular lenses, zoom 0-3.9 degrees, electronic focusing 20 meters
 Pan/Tilt rotation : 540°/ 280°
 Control Method: International standard DMX512 signal, 3-pin DMX512 interface.
 Protection class: IP20, overheating protection.
 Dimension size: 41×31×58cm
 Packing size: 48×40×56cm
 N.W: 21Kg
 G.W: 23Kg

CA230T /CA260T /CA280T**230W /260W /280W MOVING HEAD BEAM SPOT WASH 3IN1****Technical Parameters**

Power supply: AC 100-240V , 50/60Hz
 Power consumption: 350W
 Light source: 10R HRI 280W (230W/260W are optional)
 Channel: 18CH
 Pattern angle: 5° -20°
 Speed of light angle: 2.5° -10°
 Fixed gobo wheel: 13 gobos + white
 Rotating gobo wheel: 7 glass pattern, bi-directional rotation, easy to install and replace
 Prism: 6 and 16 rotating ladder-shaped prism mirror, bi-directional rotation, adjustable speed.
 Atomization: soft effect, easy gentle fantasy pattern effect
 Focus: linear auto focus, high-definition pattern can be projected
 Dimming: 0-100% linear dimming
 Strobe: 15 times / sec, speed adjustable
 X-axis horizontal rotation 540°, Y axis vertical movement 270°. Can automatically correct positioning
 Control mode: self-propelled, DMX512, sound control, master-slave mode
 Display: LED touch screen buttons +4 screen.
 3-pin XLR signal plug, plug the audio output of the input power
 Built-in self-propelled multiple procedures, automatic calibration analysis program
 Lamp Size: 41×31×53 cm
 Packing size: 45×42× 55cm
 Weight: 19 kg
 G.W.: 22 KG

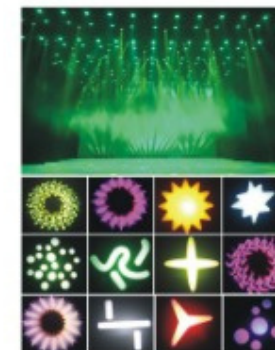CA15 /CA230 /CA280**200W /230W /280W MOVING HEAD BEAM LIGHT****Technical Parameters**


Power supply : AC 100-240V , 50/60Hz
 Power consumption : 350W
 Light source : 230W OSRAM/ YODN(200W/280W are optional)
 Control panel : LCD touch screen display function
 controls : sound activation , auto , master/slave , DMX512
 DMX channels : 16/20 channels mode
 Pan/Tilt rotation : 540°/ 270°, speed adjustable
 Color : 14color+white , with forward and reverse rainbow effect.
 Gobo wheel : fixed gobo wheel (17 patterns +white) , with rotation pattern effect.
 Prism wheel: Rotation prism can berotated forward and reverse , with prism positioning function
 Focus: Electronic focus, ultra-smooth zooming adjustable
 Atomization : 0 ~ 100% linear adjusting atomization effect
 Dimmer : 0-100% linear dimming function
 Strobe : Flash speed upto 13 times / sec, random flash optional
 Working environment : up to 40°C
 Protection rate : IP20
 Cover : High-strength temperature resistance engineering plastic shell, streamlined design.
 Dimension size : 41×31×48cm
 Packing size : 48×40×56cm
 N.W : 19 kg
 G.W : 22 kg

CE01 1000W LED STROBE



Power supply: AC110V ~ 240V 50-60Hz
 Power Consumption: 1000W
 Light Source: 1000*1WPCS high brightness LED5054 SMD
 Color: White /RGB
 Channels: 16CH /8CH Modes
 Function: Strobe speed adjustable brightness
 built-in self-propelled procedures, support full brightness
 Packing Size: 540*320*205mm
 G.W:9kg

CE03 COLORFUL LED STROBE



Power supply: AC110V ~ 240V 50-60Hz
 Power Consumption: 1000W
 Light source:240*5W white LEDs(strobe)
 64*0.6W RGB LEDs(backlight)array
 DMX channels:3/4/14channels(same as Martin Atomic)
 Setting:Control panel with backlit monochrome display
 Resolution:8 bits per color plus8-bit dimming
 G.W:9kg

CE04 WATERPROOF LED STROBE 1200W



Power supply: AC100-240V, 50Hz-60Hz
 Power consumption: 1200W
 Source: 1200*1W 4 in 1 LED5054 SMD
 effect: Colorful Strobe effect and Uniform RGBW color mixing system
 rainbow effect
 Channels: 18CH /8CH / Mode
 Control mode: DMX / Sound /Auto
 Waterproof Grade: IP65
 Size: 68 * 31 * 18CM
 Weigh:12KG

CLC64 WATERPROOF LED STROBE LIGHT



Power supply: AC100-240V, 50/60Hz
 Power consumption: 400W
 Light Source: 800 x 0.5W RGB (RGB 3in 1) LEDs
 Control mode: Auto, DMX, Master/Slave, Wireless
 DMX channels: 6/8/40/44CH
 Macro light bead subsection control: Each group of lights can control independently.
 Can be divided into 10 largest segment, camp rainbow color mixture function.
 Protection rating: IP65
 Packing size: 590 x 290 x 400 mm
 N.W: 13.5Kg

CLC16 WATERPROOF STROBE WASH LIGHT



Power supply: AC100-240V, 50Hz-60Hz
 Power consumption: 1000W
 Light Source: 96 x 10W CREE CW LED+96 RGB 5050 LED
 Control modes: Auto,DMX,Master-slave , Wireless control
 Channel modes: 6/8/11CHS
 Waterproof Grade: IP65
 Packing Size : 590 x 290 x 400 mm
 G.W: 12.5KG

CLC18 OUTDOOR LED WALL WASHER 48*3W



3W*48 RGBW /RGB 3in1 LED Wall Wash
 Power supply : AC100-240V , 50/60Hz
 Power consumption : 160W
 Light source: 3W*48pcs RGBW LEDs / 48pcs(RGB 3in1) LEDs
 Controller: DMX512,Auto,Sound Activate
 DMX Channel: 6 channels
 IP Degree:IP20 /IP65
 Packing size:580*270*520mm(3pcs)
 Gross weight:22Kg(3pcs)

CLC71 OUTDOOR LED WALL WASHER 40X10W



Power supply: AC100-240V , 50/60Hz
 Power consumption: 400W
 Light Source: 40 x 10W (RGBW 4in 1) LEDs
 Control mode: Auto, DMX, Master/Slave, Wireless
 DMX channels: 5/7/24/28CH
 Macro light bead subsection control: Each group of lights can control independently.
 Can be divided into 10 largest segment, camp rainbow color mixture function.
 Protection rating: IP65
 Packing size: 590 x 290 x 400 mm
 N.W: 11Kg

CLC72 OUTDOOR LED WALL WASHER ZOOM 40*10W



Power supply: AC100-240V, 50Hz-60Hz
 Power consumption: 400W
 Light source: 40x10W RGBW 4 in 1 LED
 DMX Channels: 8/12CHS
 Feature: Digital Zoom,multiple beam angle adjustment,DMX control
 Can be directly placed on the ground, the angle is adjustable.
 Protection rate: IP65
 Dimensions Size : 560 x 220 x 324 mm
 Packing size: 590 x 290 x 400 mm
 N.W: 12.8kg

CLC73 WATERPROOF LED CITY COLOR LIGHT 120*10W



Power supply : AC100-240V , 50/60Hz
 Power consumption:600W
 Light source: 120x10W RGBW 4 in 1 LED
 Control mode : Auto, DMX, Master/Slave
 DMX channels:4/8/12CH
 Protection rate:IP65
 Packing Size:640*410*820 mm(Fly case)
 N.W: 37 kg
 G.W: 45kg(Fly case)

CLC52 WATERPROOF LED CITY COLOR LIGHT 96*10W



Power supply: AC100-240V , 50/60Hz
 Power consumption: 600W
 Light source: 96PCS 10W leds RGBW 4in 1.
 DMX channel: 4/8/12CH
 Control Mode:Auto/Sound/Master and Salve/DMX Control
 Cooling system:Natural convection heat transfer.
 IP Rate: IP55
 Flight case size : 640*410*820mm
 G.W: 43KG



CLC02 LED FOLLOW SPOT LIGHT 330W

Power supply: AC110-240V, 50/60Hz
 Power consumption: 330W
 Light source: 150W LED
 Colors: 4 colors + White
 Gobos: 5 gobos + blank, Gobo can be determined
 Control Mode: Manual control, manual cut light, and aperture changes
 Packing size: 950 x 370 x 660mm
 N.W: 35kg with flight case



CC10 LED FOLLOW SPOT LIGHT 440W

Power supply: AC110-240V, 50/60Hz
 Power consumption: 440W
 Light source: 300W LED
 Color temperature: 6500K / 4500K / 3200K
 Colors: 4 colors + White
 Gobos: 5 gobos + blank, Gobo can be determined
 Control Mode: Manual control, manual cut light, and aperture changes
 Packing size: 950 x 370 x 660mm
 N.W: 35kg with flight case



CC08 FOLLOW SPOT LIGHT 7R 230W

Power supply: AC100-240V, 50-60Hz
 Power consumption: 280W
 Light source: 230W SR
 Color temperature: 6500K / 4500K / 3200K
 Colors: 4 colors + White
 Gobos: 5 gobos + blank, Gobo can be determined
 Control Mode: Manual control, manual cut light, and aperture changes
 Packing size: 700 x 370 x 660mm
 N.W: 26kg with flight case



CC09 FOLLOW SPOT 17R 350W

Power supply: AC100-240V, 50-60Hz
 Power consumption: 400W
 Light source: 350W 17R
 Color temperature: 6500K / 4500K / 3200K
 Colors: 4 colors + White
 Gobos: 5 gobos + blank, Gobo can be determined
 Control Mode: Manual control, manual cut light, and aperture changes
 Packing size: 700 x 370 x 660mm
 N.W: 26kg with flight case



CLG01W / CLG01 WHITE / RGBW LED PROFILE LIGHT 200W

Power supply : AC100-240V, 50/60Hz
 Power consumption : 200W
 Light source : 200W (White, Warm white, RGBW 4in1 LED)
 Beam angle : 19° / 26° / 36° / 50°
 Control mode : DMX512, Master/Slave, Stand alone
 DMX channels : 3/9CH modes
 Focus : manual focus
 Packing size : 785x320x330mm
 G.W : 8.5kg



CLG02W / CLG02 WHITE / RGBW LED ZOOM PROFILE LIGHT

Power supply : AC100-240V, 50/60Hz
 Power consumption : 200W
 Light source : 200W (White, Warm white, RGBW 4in1 LED)
 300W Led is optional
 Beam Angle: Manual Zoom 17°-50°
 Control mode : DMX512, Master/Slave, Stand alone
 DMX channels : 3/9CH modes
 4 selectable dimming curves
 Heat pipe cooling system



CLG11 LED FRESNEL ZOOM LIGHT 200W

Power supply : AC100-240V, 50/60Hz
 Power consumption : 200W
 Light source : 200W (White, Warm white)
 Color Range : 3200K/6500K
 Manual Zooming Scale : 15-50°
 Control mode : DMX512, Master/Slave, Stand alone
 DMX channels : 1, 3/2, 5/4, 8CH modes
 Focus : manual focus
 Dimensions size : 580x325x320mm
 N.W : 8.5kg



CG08 200W ZOOM COB LED PAR

Power Supply: AC100-240V, 50/60Hz
 Power Consumption: 200W
 Light Source: 200W white/Warm white COB LED
 DMX Channels : 8CH
 Control mode : DMX512, Sound, Auto, Master/slave
 Zoom angle from 6- 50 degree, and it has barn door available
 Dimension size: 255x255x365mm
 G.W : 5KG



CLG12 200W ZOOM AND COLORFUL COB LED PAR

Power supply : AC100-240V, 50/60Hz
 Power consumption : 250W
 Light source : 200W LED lamp beads
 Color: red yellow blue green white
 Control mode : DMX512, Master/Slave, Auto
 Channel: 4CH
 Zoom angle from 6- 50 degree, and it has barn door available
 Dimension size: 255x255x365mm
 G.W : 5KG

CLC67 LED WALL WASHER 14*30W

Power supply: AC90V-245V/50-60Hz
 Power consumption: 450W
 Light source: 14pcs 30W LED RGB 3IN1 LED
 Control Mode:DMX512/Sound / Master-Slave/ Auto
 Function: dimmer, strobe, gradual change, Led dot controlled
 Each bulb and its color can be controlled individually
 IP Degree:IP20 /IP65
 Packing size: 1100x150x210 mm
 G.W: 8kg



CLC39 LED WALL WASHER 18*10W

Power supply: AC90-240V, 50/60Hz
 Power consumption: 200W
 Light source: 18*10W RGBW 4in1 led
 Control mode:DMX512/Sound/ Master-Slave/ Auto
 IP Degree:IP20 /IP65
 Packing Size: 1110 x 180 x 230 mm
 N.W: 5.5KG



CLC62 WATERPROOF LED WALL WASHER 18*10W

Power supply: AC90-240V, 50/60Hz
 Power consumption: 200W
 Light source: 18*10W RGBW 4in1 led
 Control mode: DMX512/Sound/ Master-Slave/ Auto
 Function: dimmer, strobe, gradual change, Led dot controlled
 Each bulb and its color can be controlled individually
 IP Degree:IP20 /IP65
 Packing Size: 1110 x 180 x 230 mm
 N.W: 5.5KG



CLC65 WATERPROOF LED WALL WASHER 24*10W

Power supply: AC90-240V, 50/60Hz
 Power consumption: 200W
 Light source: 24*10W RGBW 4in1 led
 Control mode: DMX512/Sound/ Master-Slave/ Auto
 IP Degree:IP20 /IP65
 Packing Size: 1110 x 180 x 230 mm
 N.W: 5.5KG



CLC60 WATERPROOF LED WALL WASHER 18*3W

Power supply: AC90-240V, 50/60Hz
 Power consumption: 60W
 Light Source: 18x3W RGB /RGB 3IN1 LED
 Control Mode:DMX512/Sound/ Master-Slave/ Auto
 IP Degree:IP20 /IP65
 Packing Size: 1070 x 285 x 380 mm
 G.W:4.5KG




CLC66 WATERPROOF LED WALL WASHER 24*3W

Power supply: AC90-240V, 50/60Hz
 Power consumption: 80W
 Light Source: 24x3W RGB /RGB 3IN1 LED
 Control Mode:DMX512/Sound/ Master-Slave/ Auto
 IP Degree:IP20 /IP65
 Packing Size:1070x285x380 mm
 G.W:4.5KG




CLC36 WATERPROOF LED WALL WASHER 36*3W

Power supply:AC90-240V, 50/60Hz
 Power consumption: 120W
 Light Source: 36x3W RGB /RGB 3IN1 LED
 Control Mode:DMX512/Sound/ Master-Slave/ Auto
 IP Degree:IP20 /IP65
 Packing Size:1070x285x380 mm
 G.W:4.5KG




CLC012 LED DANCE FLOOR 1*1M

Power supply: AC 110-220v, 50/60Hz
 Power consumption: 100w
 Light source: 432pcs/720pcs RGB leds
 Surface Board: Semi translucent acrylic
 Waterproof: IP20
 Load-bearing: 800kg/m2
 Packing size: 1090x1090x180mm
 G.W.: 38kg




CLC61 LED 3D DANCE FLOOR 50*50CM

Power supply: AC 90-260V,50-60Hz
 Power consumption: 20W
 Light source: 84pcs SMD5050 3 in 1 LED
 Control Mode: SD Control & PC control
 Protection level: IP55/65
 Load-bearing: 500kg/m2
 Dimension size: 500x500x80mm
 N.W: 11.2KG



CLC77 LED 3D DANCE FLOOR 50*50CM

Power supply: AC 90-260V,50-60Hz
 Power consumption: 15W
 Light source: 60pcs SMD5050 3 in 1 LED
 Control Mode: SD Control & PC control
 Protection level: IP55/65
 Load-bearing: 500kg/m2
 Dimension size: 500x500x70mm
 G.W.: 11.6 kg





CLD30 LED CRYSTAL BALL

Power supply: AC110V/220V, 50/60Hz
 Power Consumption: 25W
 Light Source: 6*3W RGBAWY LEDs
 Control: Auto,DMX512,Sound Activate,Master/Slave
 Packing size:600x410x360mm(12pcs)
 G.W:15.0Kg(12pcs)



CLD56L LED EIGHT PATTERN LASER LIGHT

Power supply: AC110V/220V, 50/60Hz
 Power Consumption: 50W
 Light Source: 8*3W RGBW LEDs+ RG Laser
 Control: Auto,DMX512,Sound Activate,Master/Slave
 Packing size:650x350x570mm(4pcs)
 G.W:15.0Kg(4pcs)



CLD66 LED FLOWER LASER LIGHT

Power supply: AC 100V-240V, 50Hz-60Hz
 Light source:6x3W RGBWAP LED
 spot:4x3W RGBW LED+strobe:30W COB LED
 laser: 100mW RED & 80mW GREEN
 Controls: sound activation, auto, master/slave, DMX512
 Packing size: 360x140x190mm
 G.W: 2.8 kg




CLD31 LED DOUBLE DERBY

Power supply: AC110V/220V, 50/60Hz
 Power Consumption: 30W
 Light Source: 10W*2pcs Cree LEDs
 Control: Auto,DMX512,Sound Activate,Master/Slave
 Packing size:360x350x280mm
 G.W:5.0Kg



**CLD67 /CLD20
 9EYES/18EYES LED UV LIGHT**

Power supply: AC110V/220V, 50/60Hz
 Power Consumption: 30W
 Light Source: 3W*9pcs UV LEDs
 Control: Auto,DMX512,Sound Activate,Master/Slave
 Packing size:500x70x70mm
 G.W:1.0Kg



**CLD29 /CLD36
 LED PIN SPOT/ LED COLORFUL PIN SPOT**

Power supply: AC110V/220V, 50/60Hz
 CLD29 Light Source:
 3W LED(RGYBW Single color is optional)
 CLD36 Light Source:12W RGBW 4IN1 LED (DMX)
 Dimension size: 160x150x100mm
 N.W: 0.4Kg



**CE35/CE6000
 3500W /6000W DRY ICE MACHINE**

Power supply: AC110V / 220V, 50Hz / 60Hz
 Power Consumption: 3500W/6000W
 Heat-up Time: 18min
 Water Consumption: 18L
 Max Output Coverage: 150-200square meters
 Consumables: solid dry ice
 Package Size:680x590x610mm
 G.W:23kg



CE64 LED CO2 JET MACHINE

Power supply:AC220V/110V, 50/60Hz
 Power Consumption:70W
 Max Pressure: 1400Psi
 Light Source: 12pcs*3w RGB Leds
 CO2 gas height:8-10 Meter
 DMX Channel: 6CH
 Packing size:300*300*420mm
 G.W :7.5 kg



CE66 DIGITAL CO2 JET MACHINE

Power supply: AC220V/110V, 50/60Hz
 Power Consumption: 30W
 Spray height: 8-10 Meter
 Pressure Rating: Up to 1400 psi
 Control model: DMX512 control
 Material: Co2 Food--class CO2 liquid
 Packing size: 59.5*34*28cm
 G.W: 7.0kg



CE-C22 LED CONFETTI BLOWER

Power supply:AC220V/110V, 50/60Hz
 Power Consumption:1800W
 Light Source: 12pcs*3w RGB Leds
 Spray Height:5-6m
 DMX Channel: 6CH
 Packing size:570*330*330mm
 G.W :9.0 kg



CE-F18 WATERBASE FOG MACHINE

Power supply:AC220V/110V, 50/60Hz
 Power Consumption:3000W
 Consumables: smoke fluid and water
 Control: Remote control /DMX 512
 Packing size:990*510*630mm
 G.W :59.0 kg



CE67 COLD SPARK MACHINE

Power supply: AC110V/AC220V,50/60Hz
 Power consumption: 400W
 Fireworks Jetting Height: 1-5 meters
 Control: DMX 512 ,Wireless Remote
 DMX Channel: 2 CH
 Packing size:30.5*30.5*34cm
 G.W: 12kg



**CH08 /CH24
TIGER TOUCH I /TIGER TOUCH II**

Using the latest operating system, no time limit, 11.0/10.1/10.0/9.1 four systems arbitrary switching
Industrial motherboard, I5cpu+4g memory + 64gb solid-state disk
There are four versions: 11.0/10.1/10.0/9.1
A 15.4-inch widescreen touch screen
20 page-turning putter, 10 macro function keys
12 DMX ports, 6144 channels
More than 1000 virtual replays;
Built-in more than 1000 light storehouses, built-in light storehouse editing software;



**CH07
PEARL 2010 LIGHTING CONTROLLER**

DMX 512/1990 standard, UP to 2048 DMX channels.
Independent power and signal can control 40 channels.
240 and 240 computer light dimming.
can store 450 programs have different time adjustable knob, built over 200light library.
Independent system lock function. Prevent misuse machine curing a variety of effects within the program effectively support the scene changes effects.
USB memory, save the field data.



CH05 QUARTZ CONTROLLER

14.1" angled touch screen, DVI for external display
Using Quartz11.0/10.1/10.0 system,
4 physical DMX XLR-3 connectors
4 DMX ports 2048 channels
I5cpu, Intel 120G SSD,4G(DDR3) notebook memory, .
Gigabit network port for Titan Net, Artnet and streaming ACN
Built in MIDI input, no extra boxes required
10 page-turning putters, 20 program storage keys,3 high quality optical encoders
Expandable with Titan Mobile Wing through dedicated USB port



CH23 1024 KINGKONG CONTROLLER

96 Units freely patched to Intelligent Fixtures
Maximum control channel for fixtures: 40 master channels+ 40 fine tuning channel
Use Library Setup Mode (Compatible with Pearl R20 Library);
Scene: available to save 60 scenes,
up to 10 scenes can be running simultaneously
Total steps of multi scenes: 600. Each scene can save 5 figures
USB flash disk: FAT32



CH25 COMMAND WING

Small and light, easy to carry, powerful, with computer use,
Programming backup is fully compatible with GrandMA 2;
2 channel DMX signal output port,
1 channel signal input port (compound type);
Supports RDM functionality
One brightness wheel, 4 encoder wheel;
One made fade, 2 A/B fader;
Parameters 6 fader lever, 12 parameter saving button



CH22 SUNNY 512 CONTROLLER

DMX512 digital output,512DMX control channel
2 optically isolated independent drive signal output port
Can control 32 16 channel computer lamp
1600 go light program step storage capacity,48 lights go programs, each program up to 100 steps. Each speed gradient parameters, independent set. 48 scenes, and at the same time on 32 computers operating lamp lantern. Shutdown data maintain



CH02 240 DMX LIGHTING CONTROLLER

There are 12 Scanner, Scanner each contains 16 channels, points A and B page
Programmable 30 Bank, each Bank contains eight Scene
Programmable 6-phase Chase,
Chase can be programmed for each step 240 (ie 30 BankScene)
MIDI has touched Bank, Chase and Black out function
There DMX polarity selector switch



CH12 PILOT 2000 CONTROLLER

Professional computer console lights and dimming lights total 2000 channels
You can control up to 40 fixtures, the largest number of channels each lamp 36
Reel designed to function channel can simultaneously control six channels, built-in light library, you can set your own function for each channel
Standard DMX input / output or RS232 output, SMPTE synchronization
Built-in universal power supply system AI4



CH01 192 DMX LIGHTING CONTROLLER

Power supply: adapter(input AC100-240V,50Hz-60Hz,output DC+12V,1A MAX)
30 banks of memory up to 240 scenes, 8 programmable chase memories.
Total 192 DMX channels,
controls 12 DMX Lights, 16 channels for each light.
4 Digital LED display figures
Packing size: 570×330×555mm(10PCS)
G.W: 23kg(10PCS)



CH15 8 DMX SPLITER

Power supply: single-phase AC220V ± 10%, frequency 50HZ ± 5%
Each signal input, 8-way isolated by the isolated signal distribution output
Digital signal: DMX512
Interface type: RS-485 and the use of RS-485 interface to transmit a variety of digital signals
Signal connection socket: three-core audio male seat
19"1U 4-way 8-way and 4/8-way conversion options



CH09 DIMMER PACK 12*4000W

Power Supply: Three-phase five-wire AC380V ± 10%
Input Rated Current: 400A input,maximum 24 channels*4kw optional for any load.
With 225A master switch,
overload and short circuit double protection high breaking air switch
Three-phase independent voltage,current,monitoring
Three output options: Bakelite plug 40A, 16A waterproof plug, 19 core plug